

EXPLOSIVES PACKAGING

For unparalleled strength, puncture resistance, tear resistance and dimensional stability insist on Valéron® Strength Films for your blasting and explosives products.

Valéron films are cross-laminated in a proprietary manufacturing process to provide a thin, tear resistant flexible film with more balanced strength than any other substrate.

- High modulus
- High burst strength
- Outstanding printability
- Excellent for F/F/S equipment
- ISO 9002 certified manufacturing
- Printing and slitting available
- Limited elongation
- Extreme puncture and tear resistance
- Filling range -70°F to 200°F (-57°C to 93°C)
- Packs explosive gels and emulsions
- Available worldwide
- Heatsealable Valex™ grades available

Valéron is 100% Recyclable as SPI #2 (HDPE).

STRONG AND VERSATILE

Valéron is waterproof and chemical resistant and can operate at extreme temperatures ranging from -70° to 200° Fahrenheit (-57° to +93° Celsius). This provides a wide temperature filling range that can be influenced by various cooling methods as cartridges are filled.



"High Performance Packing Materials"

UNIQUE PROPERTIES

Valéron film outperforms other films on the job site. It drastically reduces cartridge distortions when dropped down the borehole and reduces the chance of cartridges being lodged.

LEADING MATERIAL

Find out why leading explosives companies worldwide demand and depend on Valéron Strength Film.

WORLDWIDE AVAILABILITY

Valéron film is available in thicknesses from 3 mil to 8.6 mil (62 to 215 microns) and in widths up to 74.5 inches (1.89 meters). Its smooth print surface is ideal for eye-catching graphics and fine details.

HEATSEALABLE VERSION


Valex™ - a reformulated version of Valéron that is heatsealable is now available.



For product samples or more information about how Valéron Strength Films can develop a strong explosives packaging solution for you, call 1-800 VALÉRON or visit www.valeron.com today.



Valéron Strength Films
9505 Bamboo Road
Houston, TX 77041
Ph: 713.462.6111
Fax: 713.690.2746
1.800.Valeron
www.valeron.com
info@valeron.com

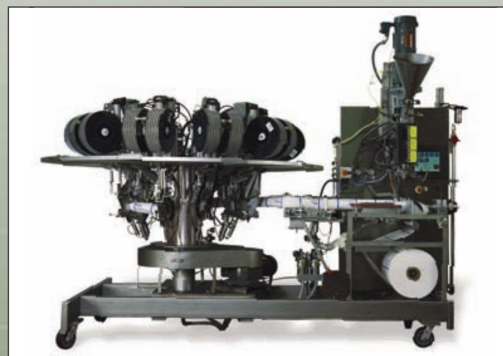

Printed on 7.5 mil C2S V-Max® Select Plus Printing Film.

© 2008 Valéron® Strength Films, an ITW Company. All product and company names are trademarks, service marks, or registered trademarks of their respective owners.